


1		2		3		4		5		6		7		8	
THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JESS-LINK PRODUCTS CO.,LTD.(JPC)				CUSTOMER DRAWING				DRWC-XXXXXX		REV.	ECN NO.	DESCRIPTION	MDF'D	APP'D	DATE
										01		INITIAL DESIGN	Philip	Richard	07/13/2023
										02					
										03					

NO	PAT. NO	NAME	MATL	SHT	TREAT	REMARK
1	V#24BLD4C-R	WIRE		3.05M		24AWG BLACK JACKET
2	TNPM-642-PF-R	4 PIN CONNECTOR		1		

Items	Electrical specifications
Rated current/voltage	AC/DC 5V-5mA min. AC/DC 125V-3A max.
Withstanding voltage	AC 300V for 1 minute
Insulation resistance	100MΩ min. at DC 500V

1	BROWN INSULATION
2	WHITE INSULATION
3	BLUE INSULATION
4	BLACK INSULATION
5	GROUND

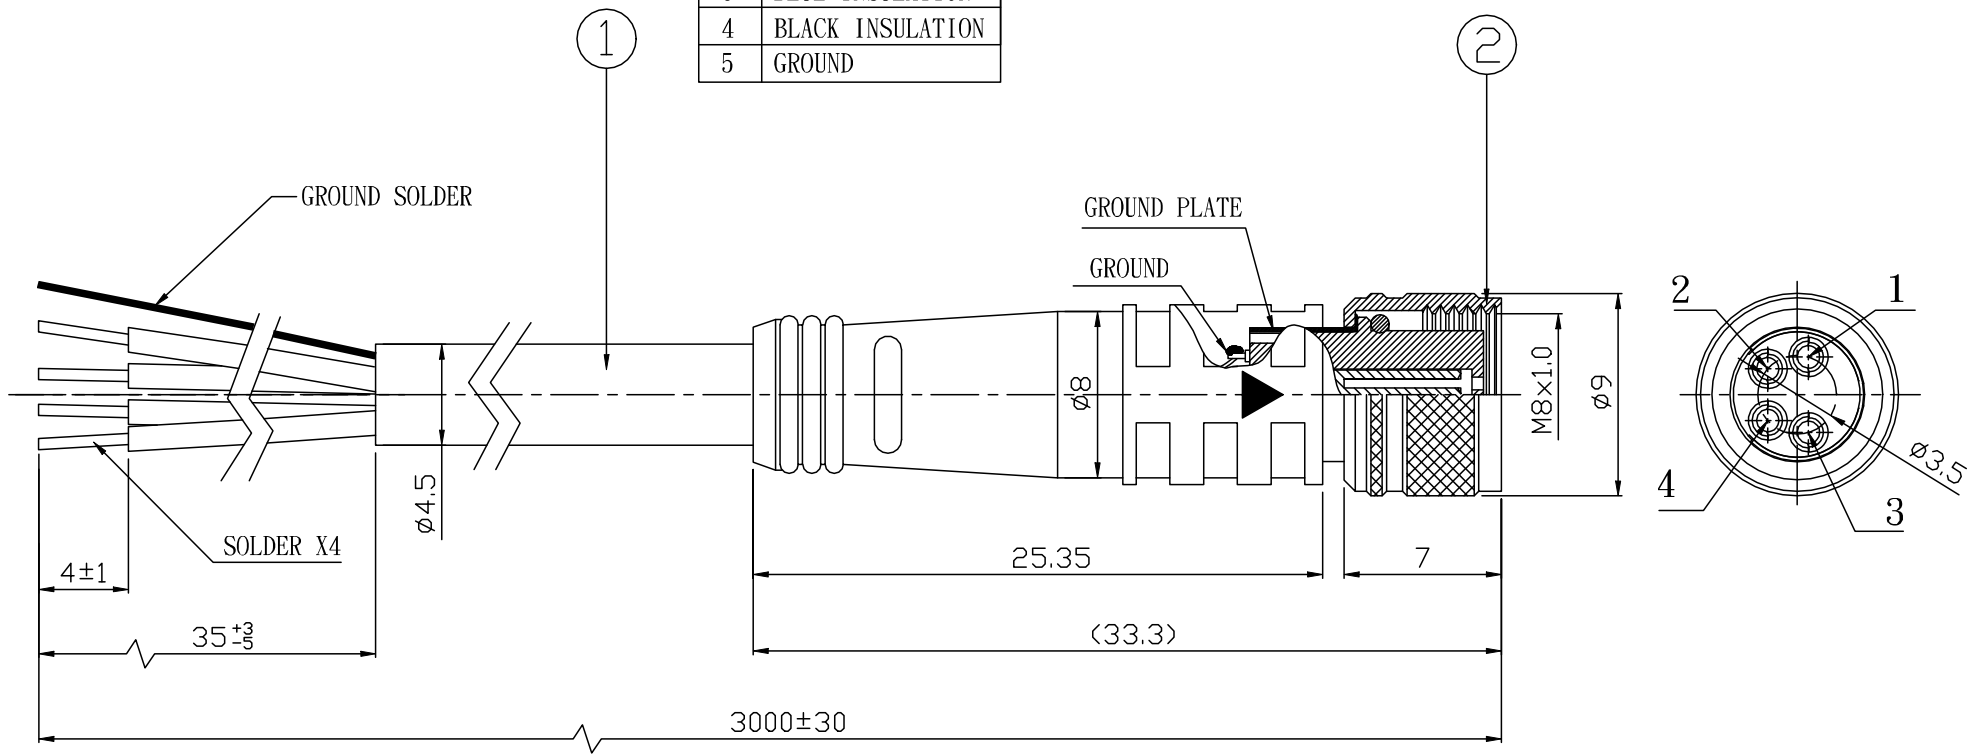

RoHS COMPLIANT	Unit:mm(inch)	PROJECTION	ZCables.com	
	GENERAL TOLERANCES: (UNLESS SPECIFIED)	D.R. 07/13/2023 Philip	TITLE	PD./FILE NO.
	0 =±1 (0.039) 0.0 =±.5 (0.02) 0.00 =±.3 (0.012) 0.000=±.15(0.006)	CH.K 07/13/2023 Philip	M8 4 Pin Plug Female Cable 3M To Open	
	0° =± 2° 0.0° =± 1°	APV.D 07/13/2023 Richard	SCALE SIZE PART NO. 1:1 A4 PZBACN030-0003	REV. 01 SHEET 1 OF 1