


1	2	3	4	5	6	7	8				
THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JESS-LINK PRODUCTS CO.,LTD.(JPC)				CUSTOMER DRAWING DRWC-XXXXXX		REV.	ECN NO.	DESCRIPTION	MDF'D	APP'D	DATE
						01		INITIAL DESIGN	Philip	Richard	07/10/2023
						02					
						03					

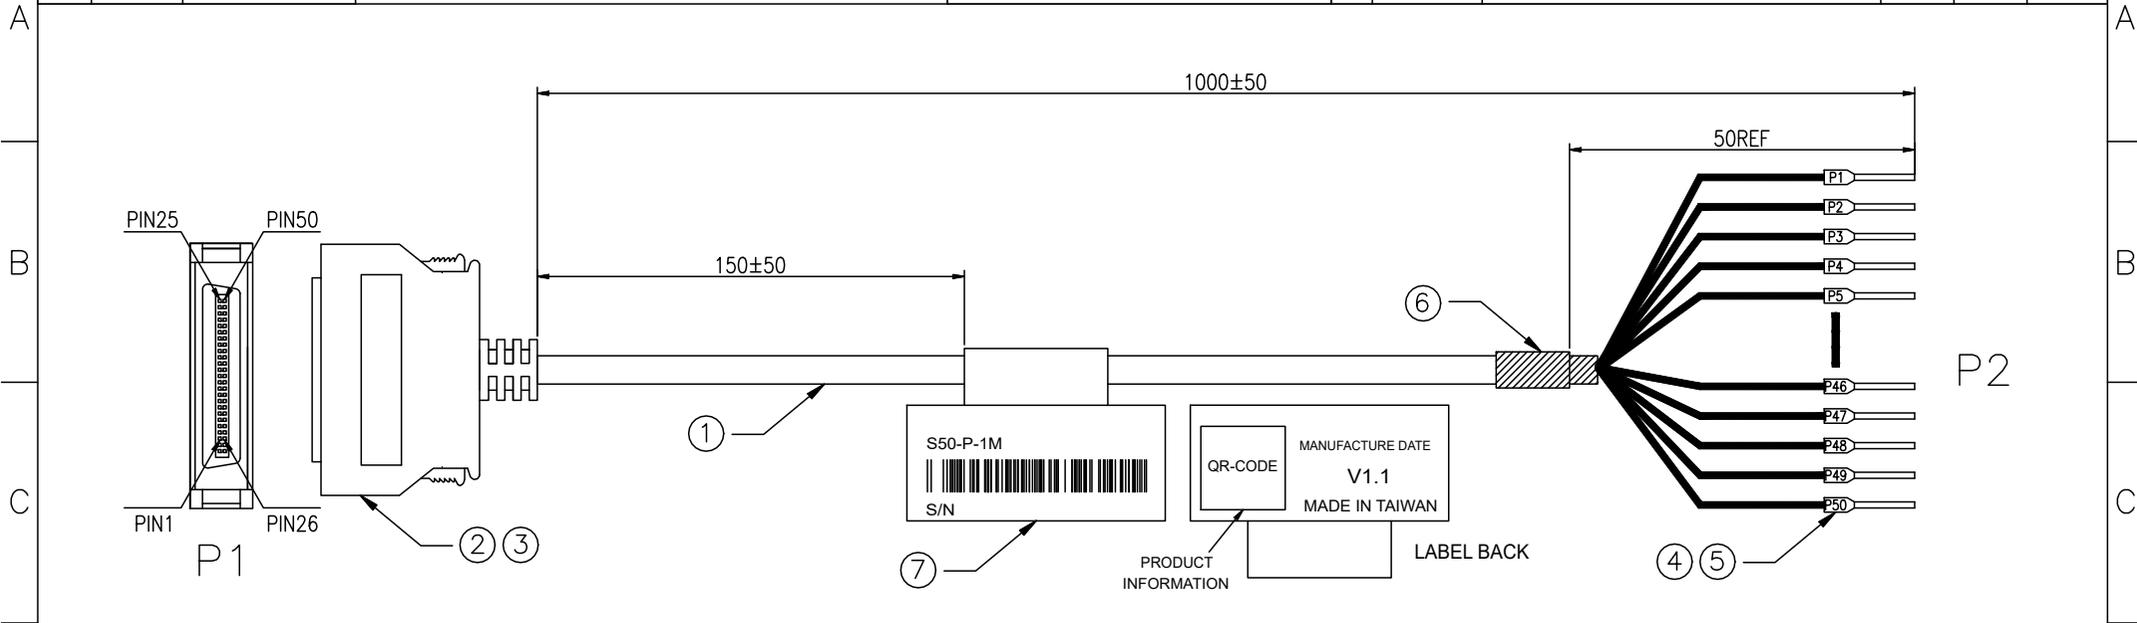

WIRE LIST			
P1		P2	
1	ORANGE/ONE POINT RED	P1	
2	GRAY/ONE POINT RED	P2	
3	WHITE/ONE POINT RED	P3	
4	YELLOW/ONE POINT RED	P4	
5	PINK/ONE POINT RED	P5	
6	ORANGE/TWO POINT RED	P6	
7	GRAY/TWO POINT RED	P7	
8	WHITE/TWO POINT RED	P8	
9	YELLOW/TWO POINT RED	P9	
10	PINK/TWO POINT RED	P10	
11	ORANGE/THREE POINT RED	P11	
12	GRAY/THREE POINT RED	P12	
13	WHITE/THREE POINT RED	P13	
14	YELLOW/THREE POINT RED	P14	
15	PINK/THREE POINT RED	P15	
16	ORANGE/FOUR POINT RED	P16	
17	GRAY/FOUR POINT RED	P17	
18	WHITE/FOUR POINT RED	P18	
19	YELLOW/FOUR POINT RED	P19	
20	PINK/FOUR POINT RED	P20	
21	ORANGE/FIVE POINT RED	P21	
22	GRAY/FIVE POINT RED	P22	
23	WHITE/FIVE POINT RED	P23	
24	YELLOW/FIVE POINT RED	P24	
25	PINK/FOUR POINT RED	P25	
26	ORANGE/ONE POINT BLACK	P26	
27	GRAY/ONE POINT BLACK	P27	
28	WHITE/ONE POINT BLACK	P28	
29	YELLOW/ONE POINT BLACK	P29	
30	PINK/ONE POINT BLACK	P30	
31	ORANGE/TWO POINT BLACK	P31	
32	GRAY/TWO POINT BLACK	P32	
33	WHITE/TWO POINT BLACK	P33	
34	YELLOW/TWO POINT BLACK	P34	
35	PINK/TWO POINT BLACK	P35	
36	ORANGE/THREE POINT BLACK	P36	
37	GRAY/THREE POINT BLACK	P37	
38	WHITE/THREE POINT BLACK	P38	
39	YELLOW/THREE POINT BLACK	P39	
40	PINK/THREE POINT BLACK	P40	
41	ORANGE/FOUR POINT BLACK	P41	
42	GRAY/FOUR POINT BLACK	P42	
43	WHITE/FOUR POINT BLACK	P43	
44	YELLOW/FOUR POINT BLACK	P44	
45	PINK/FOUR POINT BLACK	P45	
46	ORANGE/ONE LONG BLACK	P46	
47	GRAY/ONE LONG BLACK	P47	
48	WHITE/ONE LONG BLACK	P48	
49	YELLOW/ONE LONG BLACK	P49	
50	PINK/ONE LONG BLACK	P50	
	SHELL		BRAID
			SHELL

NOTE:
 1.TESTING CONDITION
 A.CONDUCTIVE RESISTANCE 2 Ohm Max.
 B.INSULATION RESISTANCE 20M Ohm Min
 WITH DC200V DURING 0.05second.

8												
7	/	/	LABEL		1 PCS	RoHS COMPLIANT	Unit:mm(inch) GENERAL TOLERANCES: (UNLESS SPECIFIED) 0 ±1 (0.039) 0.0 ±1.5 (0.02) 0.0 ±3.3 (0.012) 0.000±.15(0.006) 0° ± 2' 0.0° ± 1'	PROJECTION D.R. 07/10/2023 Philip CH.K 07/10/2023 Philip APV.D 07/10/2023 Richard	ZCables.com			PD./FILE NO. TITLE S50-P-1M 50 Pin Wire Servo Cable Wiring_L=1000mm SCALE 1:1 SIZE A4 PART NO. PZBEJA010-0003 REV. 01 SHEET 1 OF 1
6	/	/	HEAT SHRINK BLACK TUBE	1 PCS								
5	/	/	HEAT SHRINK WHITE PRINT TUBE	50 PCS								
4	/	/	EUROPEAN-STYLE TERMINAL	50 PCS								
3	/	/	50 POSITION HIGH DENSITY MINI D RIBBON (MDR) MALE CASE WITH 2X SQUEEZE RELEASE LATCHES	1 PCS								
2	/	/	50 POSITION HIGH DENSITY MINI D RIBBON (MDR) MALE PLUG	1 PCS								
1	/	/	CABLE 28AWG 25 TWISTED PAIR, 100 OHM BALANCED COLOR: BEIGE	1000MM								
ITEM	SUPL	SUPL PN	DESCRIPTION	Q'TY								