


| | | | | | | | | | | | |
|---|---|---|---|---------------------------------|---|------|---------|----------------|--------|---------|------------|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | | | | |
| THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JESS-LINK PRODUCTS CO.,LTD.(JPC) | | | | CUSTOMER DRAWING DRWC-XXXXXX | | REV. | ECN NO. | DESCRIPTION | MDF'D | APP'D | DATE |
| | | | | | | 01 | | INITIAL DESIGN | Philip | Richard | 07/11/2023 |
| | | | | | | 02 | | | | | |
| | | | | | | 03 | | | | | |

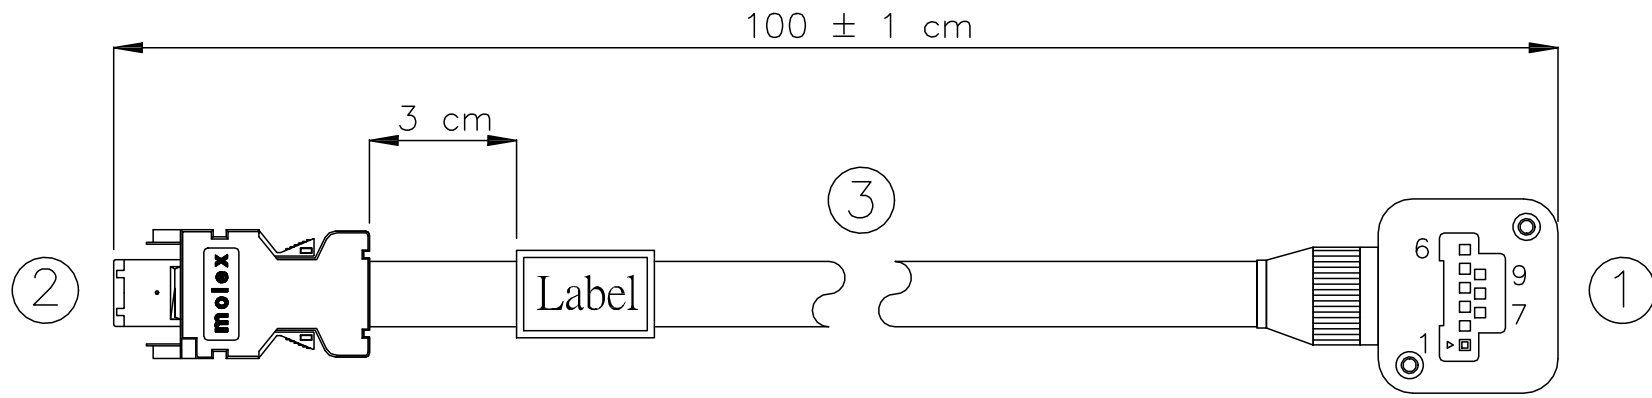

| | | | |
|------------|-------------|------------|---------------|
| Label text | | 55100-0670 | SM-54346-0070 |
| 1 | orange | 22AWG | 6 |
| 2 | green | 22AWG | 3 |
| 3 | broen | | 9 |
| 4 | brown black | | 8 |
| 5 | red | | 4 |
| 6 | red black | | 5 |
| shell | | | shell |

| | | | | | | | | | | |
|------|---|--|--|--|----------------|--|------------------|--------------------------|----------|----------------|
| | | | | | RoHS COMPLIANT | Unit:mm(inch) | PROJECTION | ZCables.com | | |
| | | | | | | GENERAL TOLERANCES: (UNLESS SPECIFIED) | D.R. 07/11/2023 | TITLE | | PD./FILE NO. |
| | | | | | | 0 = ±1 (0.039) | Philip | Encoder Cable (Flexible) | | |
| | | | | | | 0.0 = ±.5 (0.02) | CH.K 07/11/2023 | SCALE | | REV. 01 |
| | | | | | | 0.00 = ±.3 (0.012) | Philip | SIZE | PART NO. | SHEET 1 OF 1 |
| 3 | Yoshinogawa cable 25AWG * 2P + 0.3mm2 * 2C, non-twist resistant | | | | 1 | 0.000 = ±.15 (0.006) | APV.D 07/11/2023 | 1:1 | A4 | PZBHJA010-0007 |
| 2 | MOLEX CONNECTOR, 55100-0670, cable bonding | | | | 1 | 0° = ± 2' | Richard | | | |
| 1 | SUNTONE CONNECTOR, Yaskawa SM-54346-0070 (for Yaskawa 5-5) | | | | 1 | 0.0° = ± 1' | | | | |
| ITEM | DESCRIPTION | | | | Q'TY | | | | | |