


| | | | | | | | | | | | |
|---|---|---|---|---------------------------------|---|------|---------|----------------|--------|---------|------------|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | | | | |
| THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JESS-LINK PRODUCTS CO.,LTD.(JPC) | | | | CUSTOMER DRAWING DRWC-XXXXXX | | REV. | ECN NO. | DESCRIPTION | MDF'D | APP'D | DATE |
| | | | | | | 01 | | INITIAL DESIGN | Philip | Richard | 07/11/2023 |
| | | | | | | 02 | | | | | |
| | | | | | | 03 | | | | | |

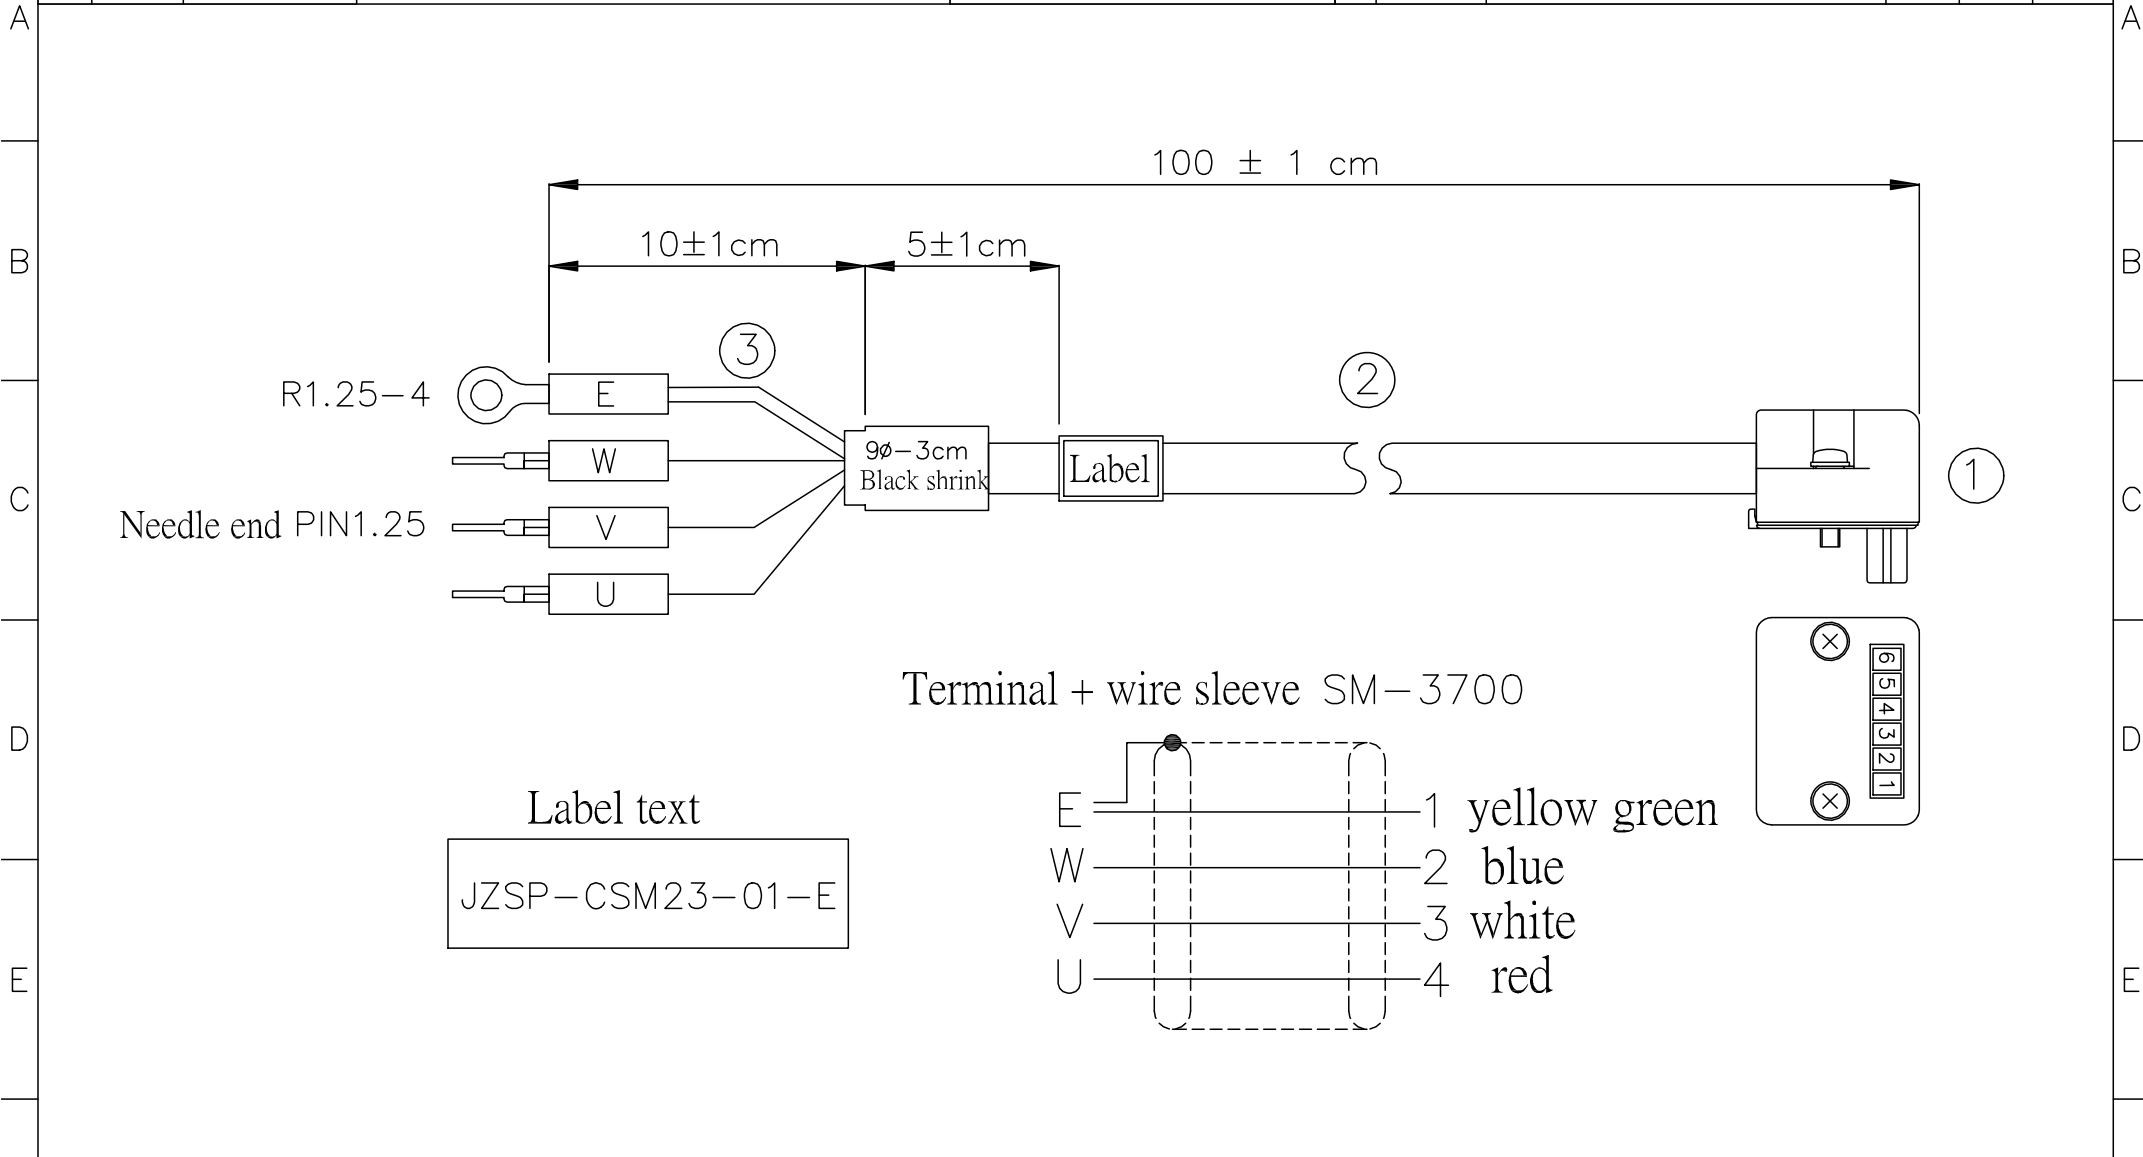

| | | | | | | | | | | |
|------|---|--|--|--|----------------|---|------------------|------------------------|----------|---------------|
| | | | | | RoHS COMPLIANT | Unit:mm(inch) | PROJECTION | ZCables.com | | |
| | | | | | | GENERAL TOLERANCES: (UNLESS SPECIFIED) | D.R. 07/11/2023 | TITLE | | PD./FILE NO. |
| | | | | | | 0 = ±1 (0.039) | Philip | Power Cable (Flexible) | | |
| | | | | | | 0.0 = ±.5 (0.02) | CH.K 07/11/2023 | SCALE | | REV. 01 |
| | | | | | | 0.00 = ±.3 (0.012) | Philip | SIZE | PART NO. | SHEET 1 OF 1 |
| 3 | PEWC cable (green), UL1007,20AWG (0.5mm) | | | | 0.11 | 0" = ± 2' | APV.D 07/11/2023 | 1:1 | A4 | PZBHA010-0008 |
| 2 | GORE cable 0.75mm2 * 4C braided isolation-black | | | | 1 | 0.0" = ± 1" | Richard | | | |
| 1 | Worldwide CONNECTOR,Yaskawa SM-3700 POWER (for Yaskawa Σ-5) | | | | 1 | | | | | |
| ITEM | DESCRIPTION | | | | Q'TY | | | | | |