


1	2	3	4	5	6	7	8				
THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JESS-LINK PRODUCTS CO.,LTD.(JPC)				CUSTOMER DRAWING DRWC-XXXXXX		REV.	ECN NO.	DESCRIPTION	MDF'D	APP'D	DATE
						01		INITIAL DESIGN	Philip	Richard	07/12/2023
						02					
						03					

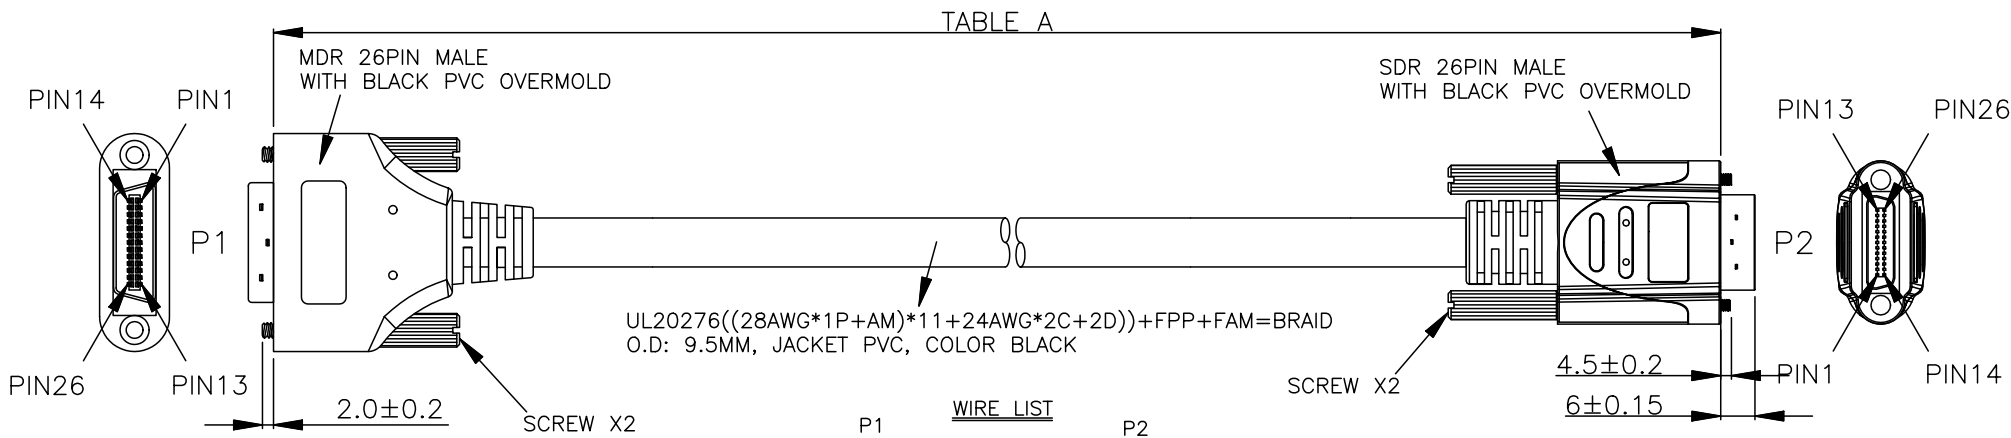

UL20276((28AWG*1P+AM)*11+24AWG*2C+2D))+FPP+FAM=BRAID
O.D: 9.5MM, JACKET PVC, COLOR BLACK

WIRE LIST

P1		P2
1	RED(24AWG 12V DC)	1
14	DRAIN(24AWG GND)	14
2	WHITE	25
15	WHITE/BLACK	12
3	WHITE	24
16	WHITE/GREEN	11
4	WHITE	23
17	WHITE/BLUE	10
5	WHITE	22
18	WHITE/PURPLE	9
6	WHITE	21
19	WHITE/GRAY	8
7	WHITE	20
20	WHITE/YELLOW	7
8	WHITE	19
21	WHITE/ORANGE	6
9	WHITE	18
22	WHITE/BROWN	5
10	WHITE	17
23	WHITE/GREEN	4
11	WHITE/BLACK	16
24	WHITE/RED	3
12	WHITE	15
25	WHITE/RED	2
13	DRAIN(24AWG GND)	13
26	BLACK(24AWG 12V)	26
Shell	BRAID	Shell


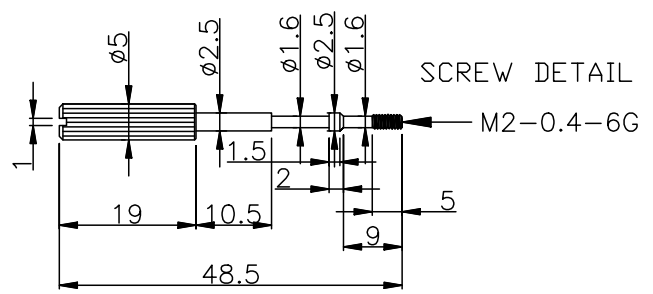


TABLE A

JPC P/N	Length(mm)
PZBMLF030-0001	3000±20

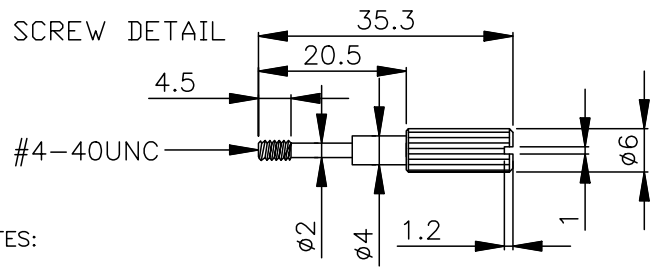

NOTES:

MATERIAL:
CONNECTOR:
MDR 26PIN MALE, GOLD FLASH CONTACT, BLACK INSULATOR
SDR 26PIN MALE, GOLD FLASH CONTACT, BLACK INSULATOR

SCREW: #4-40UNC, 6.0*35.3MM, NICKEL PLATED

SCREW: M2-0.4-6G, 5.0*48.5MM, NICKEL PLATED

ELECTRONIC:
RATED CURRENT: 1A
RATED VOLTAGE: 30V

ENVIRONMENTAL:
OPERATING TEMPERATURE: -20°C TO 75°C

TESTING CONDITION:
CONDUCTIVE RESISTANCE 2 Ohm Max.
INSULATION RESISTANCE 20M Ohm Min
WITH DC200V DURING 0.05Second.
100% OPEN, SHORT MISWITED TEST

RoHS COMPLIANT	Unit:mm(inch)	PROJECTION	ZCables.com		
	GENERAL TOLERANCES: (UNLESS SPECIFIED)	D.R. 07/12/2023			
	0 =±1 (0.039)	Philip	TITLE	PD./FILE NO.	
	0.0 =±.5 (0.02)	CH.K 07/12/2023	MDR 26 Pin To SDR 26 Pin With PoCL Cable Assembly		
0.00 =±.3 (0.012)	Philip	SCALE	SIZE	PART NO.	REV. 01
0.000=±.15(0.006)	APV.D 07/12/2023	1:1	A4	PZBMLE0XX-XXXX	SHEET 1 OF 1
0° =± 2'	Richard				
0.0° =± 1'					