


THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JESS-LINK PRODUCTS CO.,LTD.(JPC)

CUSTOMER DRAWING
DRWC-008508

REV.	ECN NO.	DESCRIPTION	MDF'D	APP'D	DATE
01		INITIAL DESIGN	Philip	Richard	10/05/2023
02					
03					

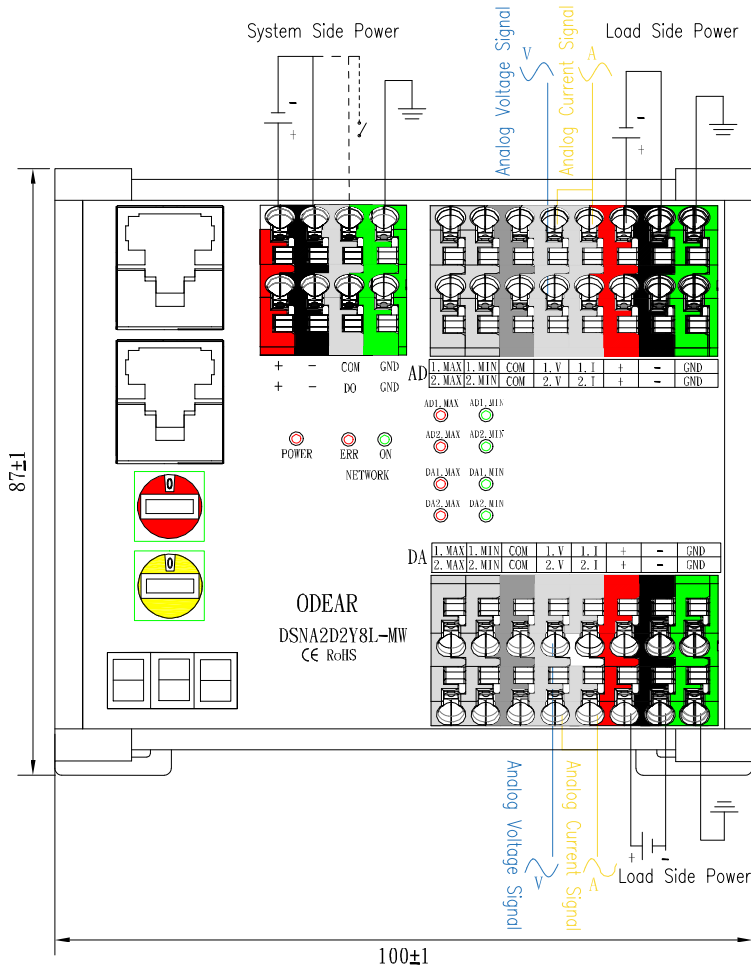

1. Connection setting:
Use the red button to select corresponding communication protocol according to network setting. For details, please refer to the controller manual.

4. Button definition:




Red button: To select controller communication protocol and channel.



Yellow button: Information indicator selection.

2. Terminal block spec:
For details, please refer to the terminal block user manual.
Suggested plug part number: CE1.0-10

5. Seven-segment display:




Each 0-Dear's five network module have three seven-segment display to indicate information.

3. LED definition:
Analog / Digital section
Red: Maximum
Green: Minimum
Power section
On: Green light on
Off: Green light off
Error section:
With error: Red light on
Without error: Red light off

Application
CC-Link IE
Field Basic
Profinet
EtherCAT
EtherNet/IP
MODBUS-TCP/IP

6. Magic design terminal block:



Red: 24V +
Black: 0 -
Green: Ground
Light grey: Signal
Dark grey: COM
AD: Analog input
DA: Analog output

RoHS COMPLIANT	Unit:mm(inch)	PROJECTION	ZCables.com	
	GENERAL TOLERANCES: (UNLESS SPECIFIED)	D.R. 10/05/2023		
	0 = ±1 (0.039)	Philip	TITLE	PD./FILE NO.
	0.0 = ±1.5 (0.062)	CH.K 10/05/2023	Five Networks I/O LED Series	
0.00 = ±0.3 (0.012)	Philip	SCALE	SIZE	PART NO.
0.000 = ±0.15 (0.006)	APV.D 10/05/2023	1:1	A4	DSNA22Y8L-MW
0° = ± 2'	Richard			REV. 01
0.0° = ± 1'				SHEET 1 OF 1