


1	2	3	4	5	6	7	8				
THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JESS-LINK PRODUCTS CO.,LTD.(JPC)				CUSTOMER DRAWING DRWC-XXXXXX		REV.	ECN NO.	DESCRIPTION	MDF'D	APP'D	DATE
						01		INITIAL DESIGN	Philip	Richard	07/06/2023
						02					
						03					

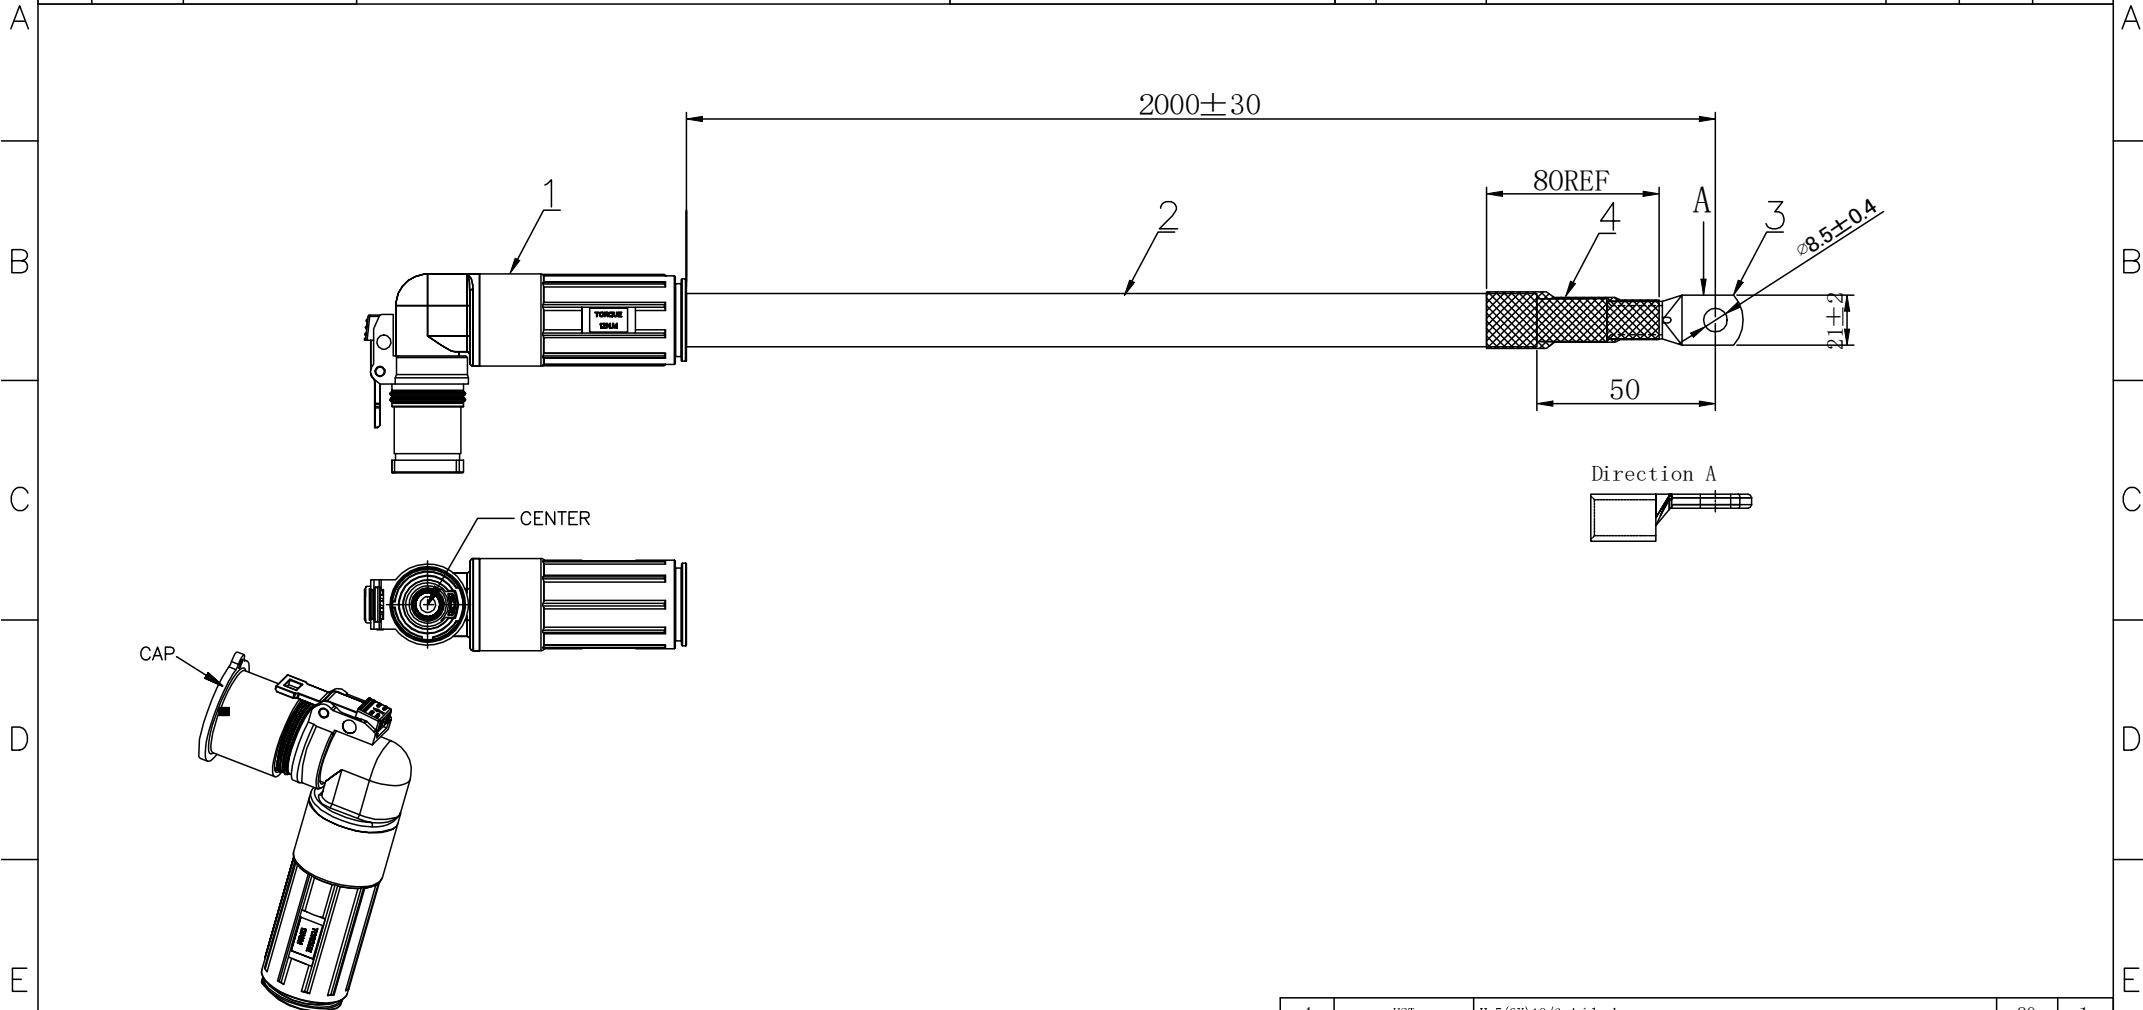

SPEC:

- 1. Insulation material : XLPE;
- 2. Rated voltage : 1500V;
- 3. Rated Temperature : 125°C;
- 4. Waterproof level : IP67.

4	HST	H-5 (3X) 19/6.4 black	80	1
3	Terminal	SC70-8		1
2	Cable	EV-70mm ² shielded XLPE Orange		2
1	Connector	TL28V-301-70		1
序号	名称	规格型号	长度	数量

RoHS COMPLIANT	Unit:mm(inch)	PROJECTION	ZCables.com	
	GENERAL TOLERANCES: (UNLESS SPECIFIED)	D.R. 07/06/2023		
	0 =±1 (0.039)	Philip	TL300 R/A Plug To M8 Tongue Terminal , 70mm ² , Orange Cable , L=2M	PD./FILE NO.
	0.0 =±.5 (0.02)	CH.K 07/06/2023		
0.00 =±.3 (0.012)	Philip	SCALE	SIZE	PART NO.
0.000=±.15(0.006)	APV.D 07/06/2023	1:1	A4	PZBDRQ020-0006
0° =± 2'	Richard			REV. 01
0.0° =± 1'				SHEET OF 1