


THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JESS-LINK PRODUCTS CO.,LTD.(JPC)

CUSTOMER DRAWING
DRWC-008508

REV.	ECN NO.	DESCRIPTION	MDF'D	APP'D	DATE
01		INITIAL DESIGN	Philip	Richard	11/30/2023
02					
03					

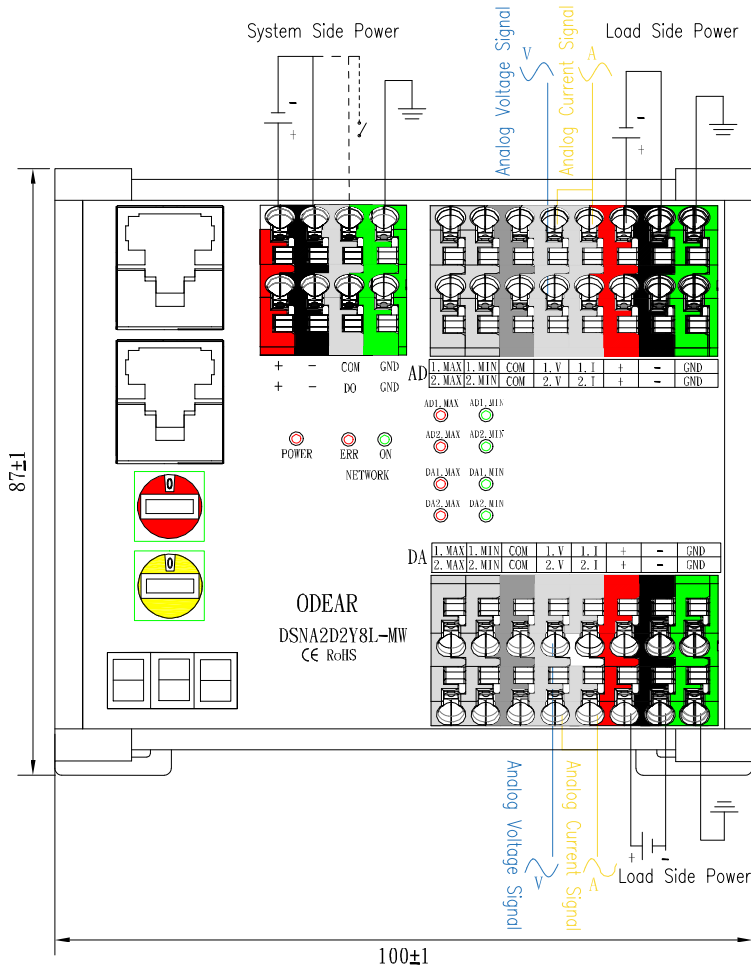

1. Connection setting:
Use the red button to select corresponding communication protocol according to network setting. For details, please refer to the controller manual.

2. Terminal block spec:
For details, please refer to the terminal block user manual.
Suggested plug part number: CE1.0-10

3. LED definition:
Analog / Digital section
Red: Maximum
Green: Minimum
Power section
On: Green light on
Off: Green light off
Error section:
With error: Red light on
Without error: Red light off

4. Button definition:




Red button: To select controller communication protocol and channel.



Yellow button: Information indicator selection.


5. Seven-segment display:



Each 0-Dear's five network module have three seven-segment display to indicate information.

Application
CC-Link IE
Field Basic
Profinet
EtherCAT
EtherNet/IP
MODBUS-TCP/IP

6. Magic design terminal block:



Red: 24V +
Black: 0 -
Green: Ground
Light grey: Signal
Dark grey: COM
AD: Analog input
DA: Analog output

RoHS COMPLIANT	Unit:mm(inch)	PROJECTION	ZCables.com	
	GENERAL TOLERANCES: (UNLESS SPECIFIED)	D.R. 11/30/2023	TITLE	PD./FILE NO.
	0 =±1 (0.039)	Philip	Five Networks I/O LED Series	
	0.0 =±.5 (0.02)	CH.K 11/30/2023	SCALE	REV. 01
0.00 =±.3 (0.012)	Philip	SIZE	SHEET 1 OF 1	
0.000=±.15(0.006)	APV.D 11/30/2023	PART NO.		
0° =± 2'	Richard	PZBPA2D2Y8LMW		
0.0° =± 1'				