

High Power Series Connector



XL60 Receptacle

XL60, X-Code, Receptacle, Female Contact, Crimp, IP67 (Mating), Non-HVIL Connector, 6mm²


Technical Data

Current Rating	45A
Voltage Rating	1000 VDC
Dielectric Withstanding Voltage	500 VAC
Operating Temperature Range	-40 °C to 125 °C
Mating Cycles	100 Min
Contact Resistance	2.3 mΩ Max
Insulation Resistance	200 MΩ Min

Product Features

Electrical Interlock (HVIL)	No
Shielding	Yes
Automatic Secondary Lock	Yes
Protection Class	IP67 (Mating)
Termination	Crimp
Adopt Cable Size	6mm ²

Key Direction

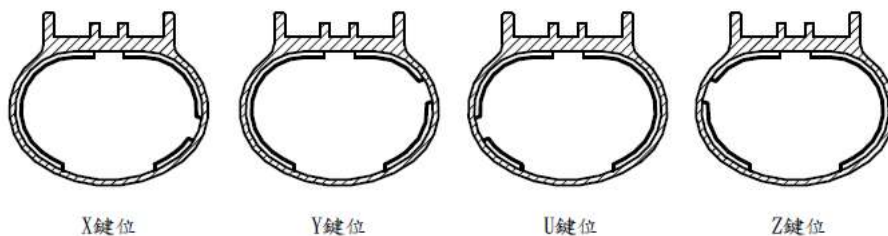

X鍵位

Y鍵位

U鍵位

Z鍵位