


1		2		3		4		5		6		7		8		
			THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JESS-LINK PRODUCTS CO.,LTD.(JPC)	CUSTOMER DRAWING DRWC-XXXXXX					REV.	ECN NO.	DESCRIPTION		MDF'D	APP'D	DATE	
									01		INITIAL DESIGN		Philip	Richard	12/18/2023	
									02							
									03							

THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JESS-LINK PRODUCTS CO.,LTD.(JPC)

CUSTOMER DRAWING  
DRWC-XXXXXX

No.	ELECTRICAL CHARACTERISTICS	
1	Rated current/voltage	10A 250V
2	Operating limit voltage (v.)	250
3	Rated voltage (V.)	1000
4	Insulation resistance (MΩ MIN.)	2000
5	Contact resistance (mΩ MAX.)	3
6	Pin diameter (ømm)	1.6

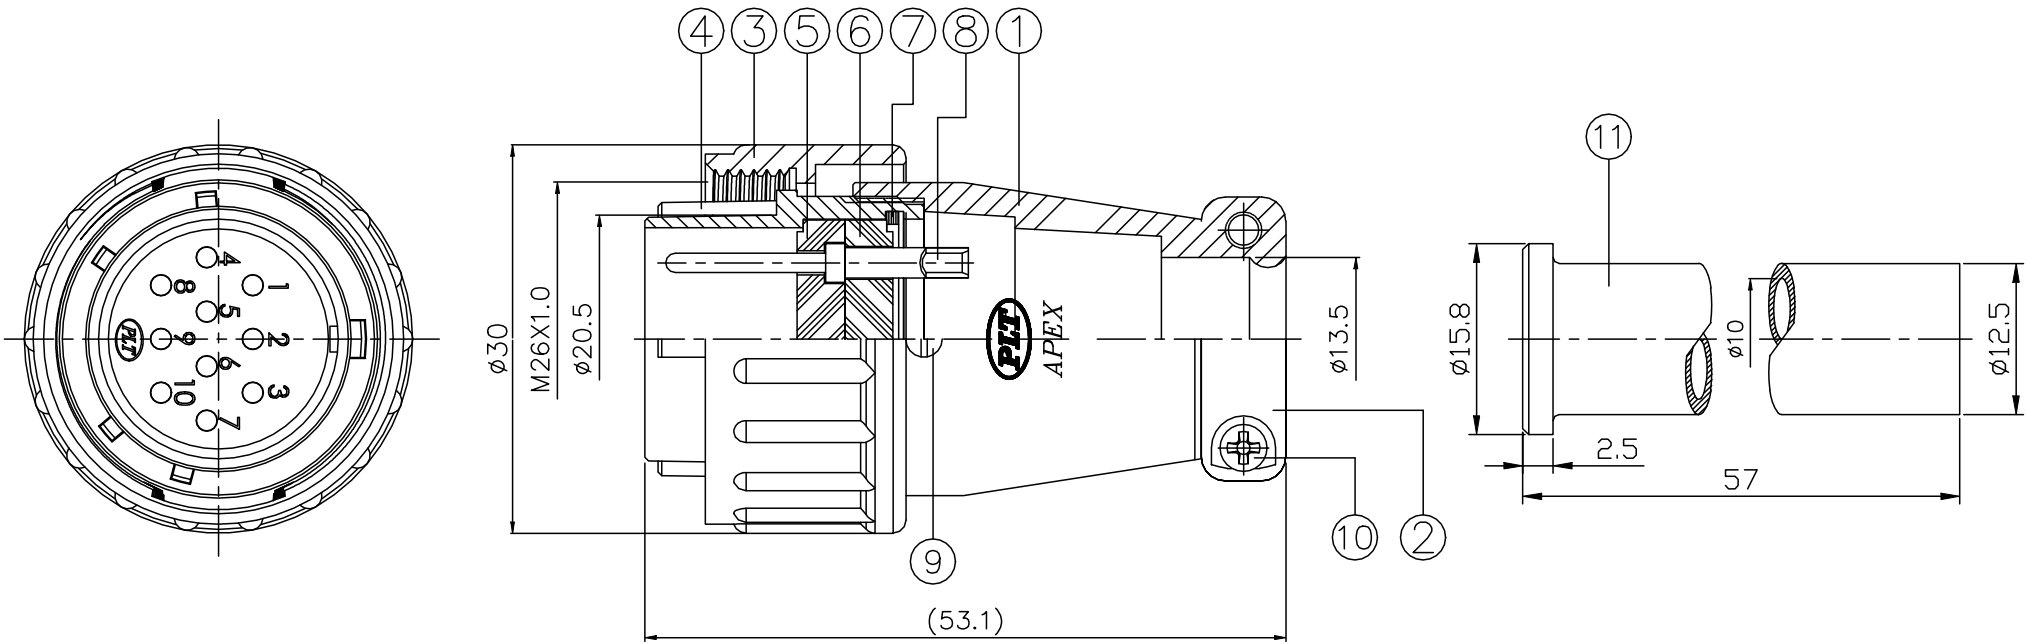

11	PIPE , RUBBER , ACCESSORIES	1 PCS
10	SCREW , STEEL , M-NI , M3x0.5Px10L	2 PCS
9	SCREW , COPPER ALLOY , M-NI	1 PCS
8	CONTACT , COPPER ALLOY , M-AU	10 PCS
7	RING , SUS	1 PCS
6	INSULATOR , BAKELITE	1 PCS
5	INSULATOR , BAKELITE	1 PCS
4	TOOTH BODY , ZN ALLOY , M-CR	1 PCS
3	CAP , ZN ALLOY , M-CR	1 PCS
2	CLAMP , ZN ALLOY , M-CR	1 PCS
1	BODY , ZN ALLOY , M-CR	1 PCS
ITEM	DESCRIPTION	Q'TY

RoHS COMPLIANT

Unit:mm(inch)

GENERAL TOLERANCES:  
(UNLESS SPECIFIED)  
0 ±1 (0.039)  
0.0 ±1.5 (0.062)  
0.00 ±0.3 (0.012)  
0.000 ±0.15(0.006)  
0° ± 2'  
0.0° ± 1'

PROJECTION



D.R. 12/18/2023  
Philip  
CH.K 12/18/2023  
Philip  
APV.D 12/18/2023  
Richard

TITLE  
Industrial Square-24 Series 10 Pin Plug Male Contact  
SCALE 1:1  
SIZE A4  
PART NO. PZAAAPLSA24101  
REV. 01  
SHEET OF 1

ZCables.com

PD./FILE NO.