


| | | | | | | | | | | | |
|---|---|---|---|---------------------------------|---|------|---------|----------------|--------|---------|------------|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | | | | |
| THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JESS-LINK PRODUCTS CO.,LTD.(JPC) | | | | CUSTOMER DRAWING DRWC-XXXXXX | | REV. | ECN NO. | DESCRIPTION | MDF'D | APP'D | DATE |
| | | | | | | 01 | | INITIAL DESIGN | Philip | Richard | 01/02/2024 |
| | | | | | | 02 | | | | | |
| | | | | | | 03 | | | | | |

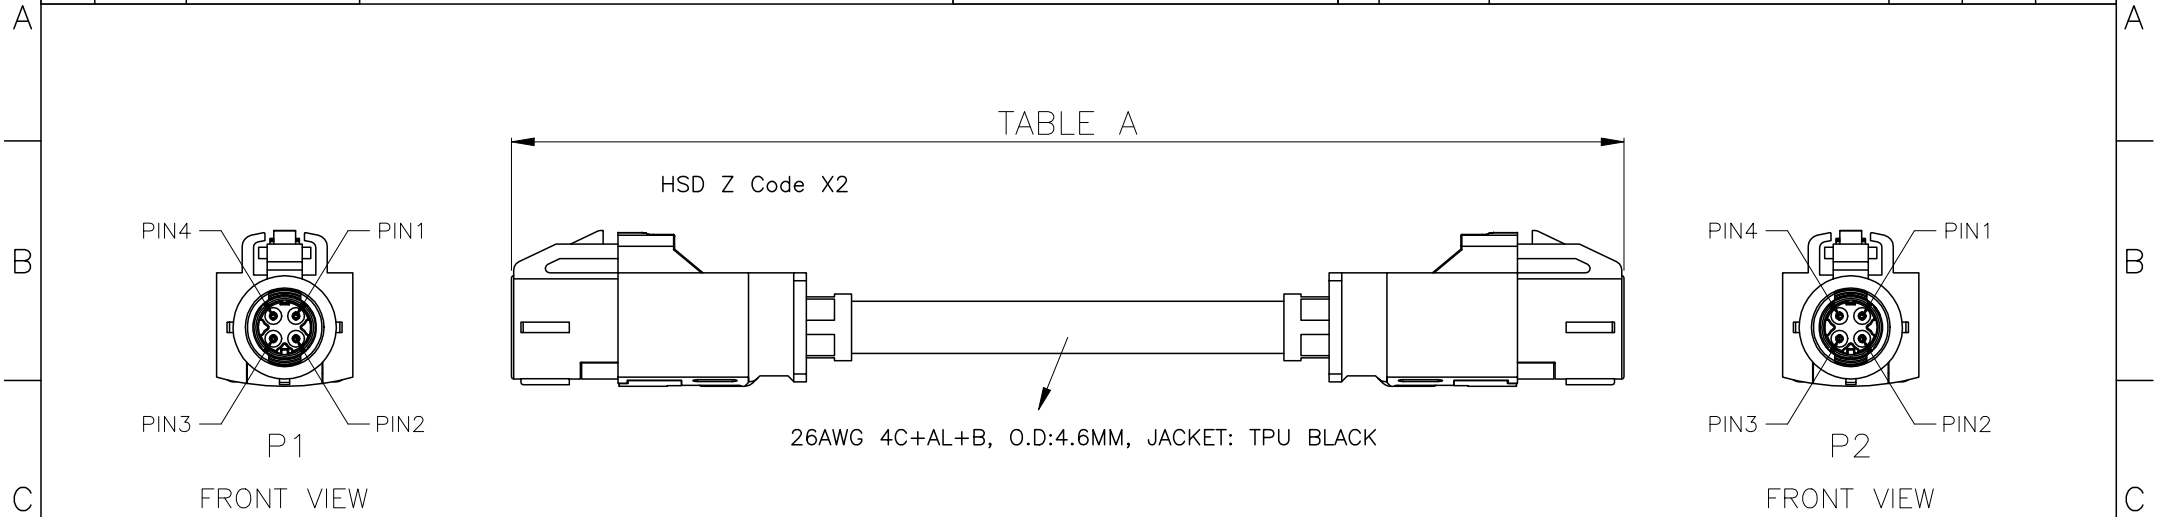

NOTES:

MATERIAL:
CONNECTOR: FAKRA HSD STRIGHTA TYPE JACK
MATERIAL: INSULATOR PBT, COLOR WATER BLUE
SHELL: BRASS/PHOSPHOR BRONZE
CRIMP CONTACT PLATING: 6U" GOLD

ELECTRONIC:
IMPEDANCE: 100±10Ω
INSULATION RESISTANCE: 1000MΩ FOR CONNECTOR

ENVIRONMENTAL:
OPERATING TEMPERATURE RANGE: -40°C TO 105°C

TESTING CONDITION:
CONDUCTIVE RESISTANCE 2 Ohm Max.
INSULATION RESISTANCE 20M Ohm Min
WITH DC200V DURING 0.05second.
100% OPEN, SHORT MISWITED TEST

WIRE LIST








| | | | | |
|-------|--------|--|-------|--|
| P1 | | | P2 | |
| PIN1 | BLUE | | PIN4 | |
| PIN2 | ORANGE | | PIN3 | |
| PIN3 | GREEN | | PIN2 | |
| PIN4 | BROWN | | PIN1 | |
| Shell | | | Shell | |


TABLE A

| | |
|----------------|------------|
| JPC P/N | Length(mm) |
| PZBNHR020-0003 | 2000±20 |

| | | | | | |
|-----------------------|--|-----------------------------|--|------|-------------------------|
| RoHS COMPLIANT | Unit:mm(inch) | PROJECTION | ZCables.com | | |
| | GENERAL TOLERANCES: (UNLESS SPECIFIED) | D.R. 01/02/2024 Philip | TITLE HSD Z Code To HSD Z Code 4Pin Stright Cable | | |
| | 0 =±1 (0.039) 0.0 =±.5 (0.02) 0.00 =±.3 (0.012) 0.000=±.15(0.006) | CH.K 01/02/2024 Philip | SCALE | SIZE | PD./FILE NO. |
| | 0° =± 2' 0.0° =± 1' | APV.D 01/02/2024 Richard | 1:1 | A4 | REV. 01 SHEET 1 OF 2 |
| | | | PART NO. PZBNHR0XX-0003 | | |

| | | | | | | | | | | | |
|---|---|---|---|---------------------------------|---|------|---------|----------------|--------|---------|------------|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | | | | |
| THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JESS-LINK PRODUCTS CO.,LTD.(JPC) | | | | CUSTOMER DRAWING DRWC-XXXXXX | | REV. | ECN NO. | DESCRIPTION | MDF'D | APP'D | DATE |
| | | | | | | 01 | | INITIAL DESIGN | Philip | Richard | 01/02/2024 |
| | | | | | | 02 | | | | | |
| | | | | | | 03 | | | | | |

| Coding | A | B | C | D | E | F | Z |
|--------|---|---|--|---|---|---|---|
| Plug |  |  |  |  |  |  |  |
| Color | Black | White | Blue | Bordeaux | Green | Brown | Waterblue |
| RAL | sim.9005 | sim.9001 | sim.5005 | sim.4004 | sim.6002 | sim.8001 | sim.5021 |

| | | | | | |
|-----------------------|--|---|--|--------------|----------------|
| RoHS COMPLIANT | Unit:mm(inch) | PROJECTION  | ZCables.com | | |
| | GENERAL TOLERANCES: (UNLESS SPECIFIED) | D.R. 01/02/2024 Philip | TITLE HSD Z Code To HSD Z Code 4Pin Stright Cable | | |
| | 0 =±1 (0.039) 0.0 =±.5 (0.02) 0.00 =±.3 (0.012) 0.000=±.15(0.006) | CH.K 01/02/2024 Philip | SCALE | SIZE | PART NO. |
| | 0° =± 2° 0.0° =± 1° | APV.D 01/02/2024 Richard | 1:1 | A4 | PZBNHROXX-0003 |
| | | | | PD./FILE NO. | |
| | | | | REV. 01 | |
| | | | | SHEET 2 OF 2 | |