

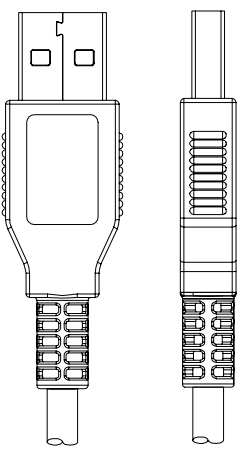


(M1)	HF-UB0073A	80P PVC	
(M2)	HF-UB0073B	45P PVC	
(M3)	HF-UB0256A*	80P PVC	
(M4)	HF-UB0173B1	45P PVC	

THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JESS-LINK PRODUCTS CO.,LTD.


PRODUCT DRAWING

REV.	DESCRIPTION	MOD'D	APP'D	DATE
D1	CHANGE WIRE LIST COLOR	DAN	VIC	11/09/2014
E1	CHANGE TOOL NUMBER	DAN	VIC	17/04/2015
F1	ADD CARTON LABEL	DAN	Sung	11/11/2016

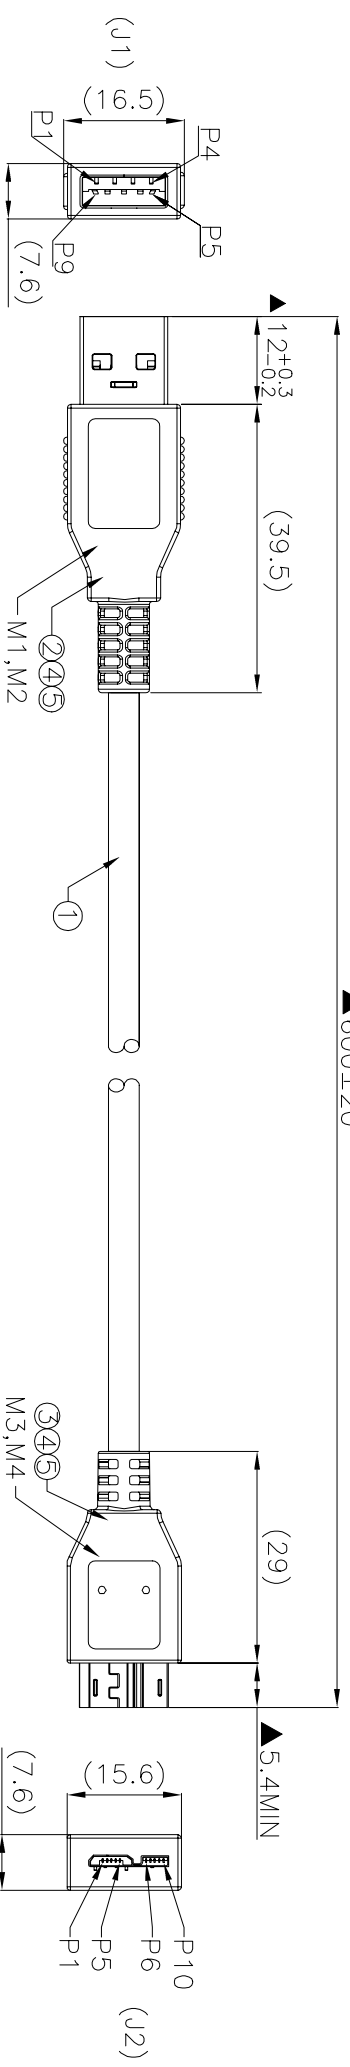

NOTE:
TESTING CONDITION
A. CONDUCTIVE RESISTANCE 2 Ohm Max.
B. INSULATION RESISTANCE 20M Ohm Min
WITH DC200V DURING 0.01second.

VBUS	1
D-	2
D+	3
GND	4
Stda-SSRX-	5
Stda-SSRX+	6
GND-DRAIN	7
Stda-SSTX-	8
Stda-SSTX+	9
Shield	SHELL

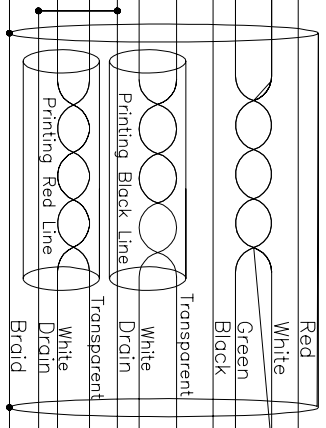

1	VBUS
2	D-
3	D+
5	GND
6	MicB-SSTX-
7	MicB-SSTX+
8	GND-DRAIN
9	MicB-SSRX-
10	MicB-SSRX+
	SHIELD

5	OVER MOLD: 45P PVC, COLOR: BLACK
4	INNER MOLD: 80P PVC, COLOR: BLACK
3	CONN: (2)MIGRO USB 3.0 B TOPPIN PLUG: INSULATOR: THERMOPLASTIC. COLOR: BLACK CONTACT: PHOSPHOR BRONZE, GOLD 30u" PLATED. SHELL: COPPER ALLOY, NICKEL PLATED
2	CONN: (1)USB 3.0 A 9PIN PLUG: INSULATOR: THERMOPLASTIC. COLOR: BLUE CONTACT: PHOSPHOR BRONZE, GOLD 30u" PLATED. SHELL: COPPER ALLOY, NICKEL PLATED
1	CABLE: USB 3.0 UL2725(32AWG*1P+EAW)*2+32AWG*1P+24AWG*2C(3+AB(65%)). JACKET: PVC COLOR: BLACK OD: 4.2mm

RoHS COMPLIANT	
Unit : mm	PROJECTION
GENERAL TOLERANCES (UNLESS SPECIFIED)	DRAWING
0 = ±.30	DR: 11/11/2016
0.00 = ±.10	Don: 11/11/2016
0.05 = ±.05	APV/D: 11/11/2016
0.5 = ±.50	David
	Sung

ZCables.com

TITLE: USB 3.0 A/M TO MICRO USB 3.0 L=600mm

CUSTOMER: C010147

CUSTOMER P/N: VCUIFK06000000-H

FILE NO: D00987

FILE: JPC-S04089

SCALE: NONE

SIZE: A4

PART NO: PCB042100355-1

REV: F1

SH.T NO: 10F2