


THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JESS-LINK PRODUCTS CO.,LTD.(JPC)

CUSTOMER DRAWING
DRWC-XXXXXX

REV.	ECN NO.	DESCRIPTION	MDF'D	APP'D	DATE
01		INITIAL DESIGN	Philip	Richard	07/06/2023
02					
03					

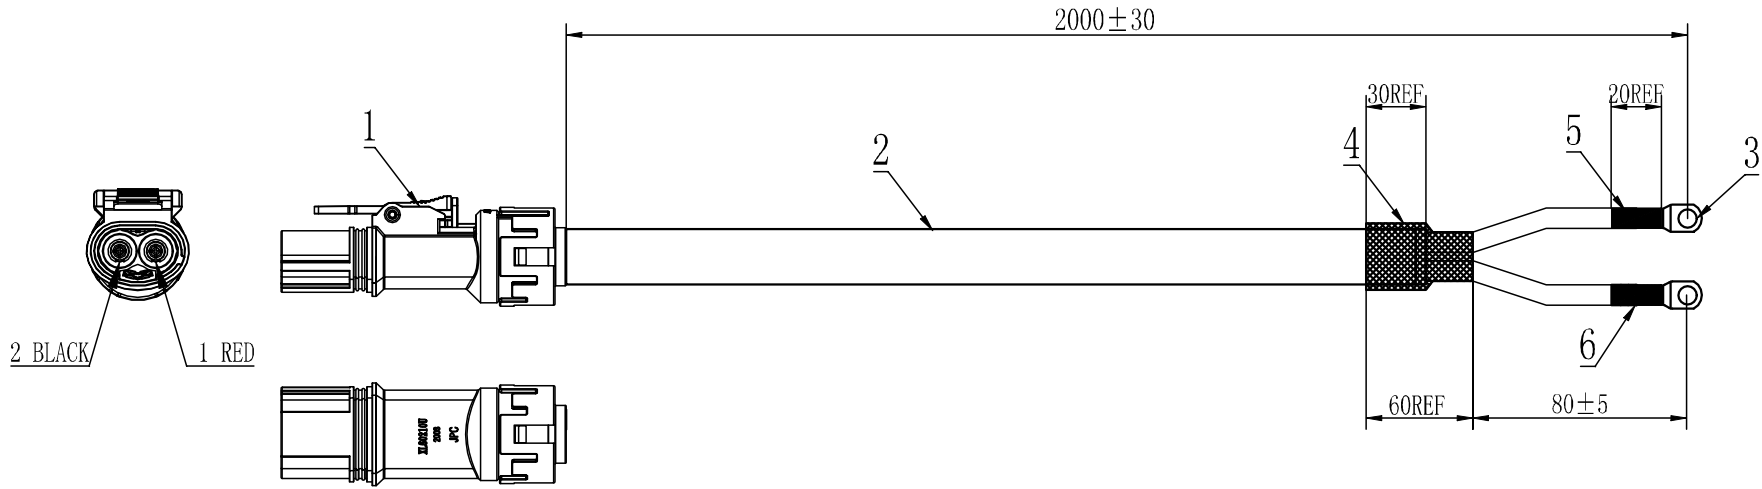

6	HST	H-5(3X)6/2 black	20	1
5	HST	H-5(3X)6/2 RED	20	1
4	HST	H-5(3X)15/5 black	60	1
3	Terminal	SC6-8		2
2	Cable	EV-2CX6mm ² shielded XLPE ORANGE		1
1	Connector	XL60 PLUG		1
序号	名称	规格型号	长度	数量

SPEC:
1. Insulation material : XLPE;
2. Rated voltage : 1500V;
3. Rated Temperature : 125°C;

REHS COMPLIANT	Unit:mm(inch)	PROJECTION 	ZCables.com	
	GENERAL TOLERANCES: (UNLESS SPECIFIED) 0 =±1 (0.039) 0.0 =±.5 (0.02) 0.00 =±.3 (0.012) 0.000=±.15(0.006) 0° =± 2° 0.0° =± 1°	D.R. 07/06/2023 Philip CH.K 07/06/2023 Philip APV.D 07/06/2023 Richard		
	SCALE 1:1	SIZE A4	PART NO. PZBDRQ020-0005	REV. 01
				SHEET 1 OF 1