



1	2	3	4	5	6	7	8				
THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JESS-LINK PRODUCTS CO.,LTD.(JPC)				CUSTOMER DRAWING DRWC-XXXXXX		REV.	ECN NO.	DESCRIPTION	MDF'D	APP'D	DATE
						01		INITIAL DESIGN	Philip	Richard	07/13/2023
						02					
						03					

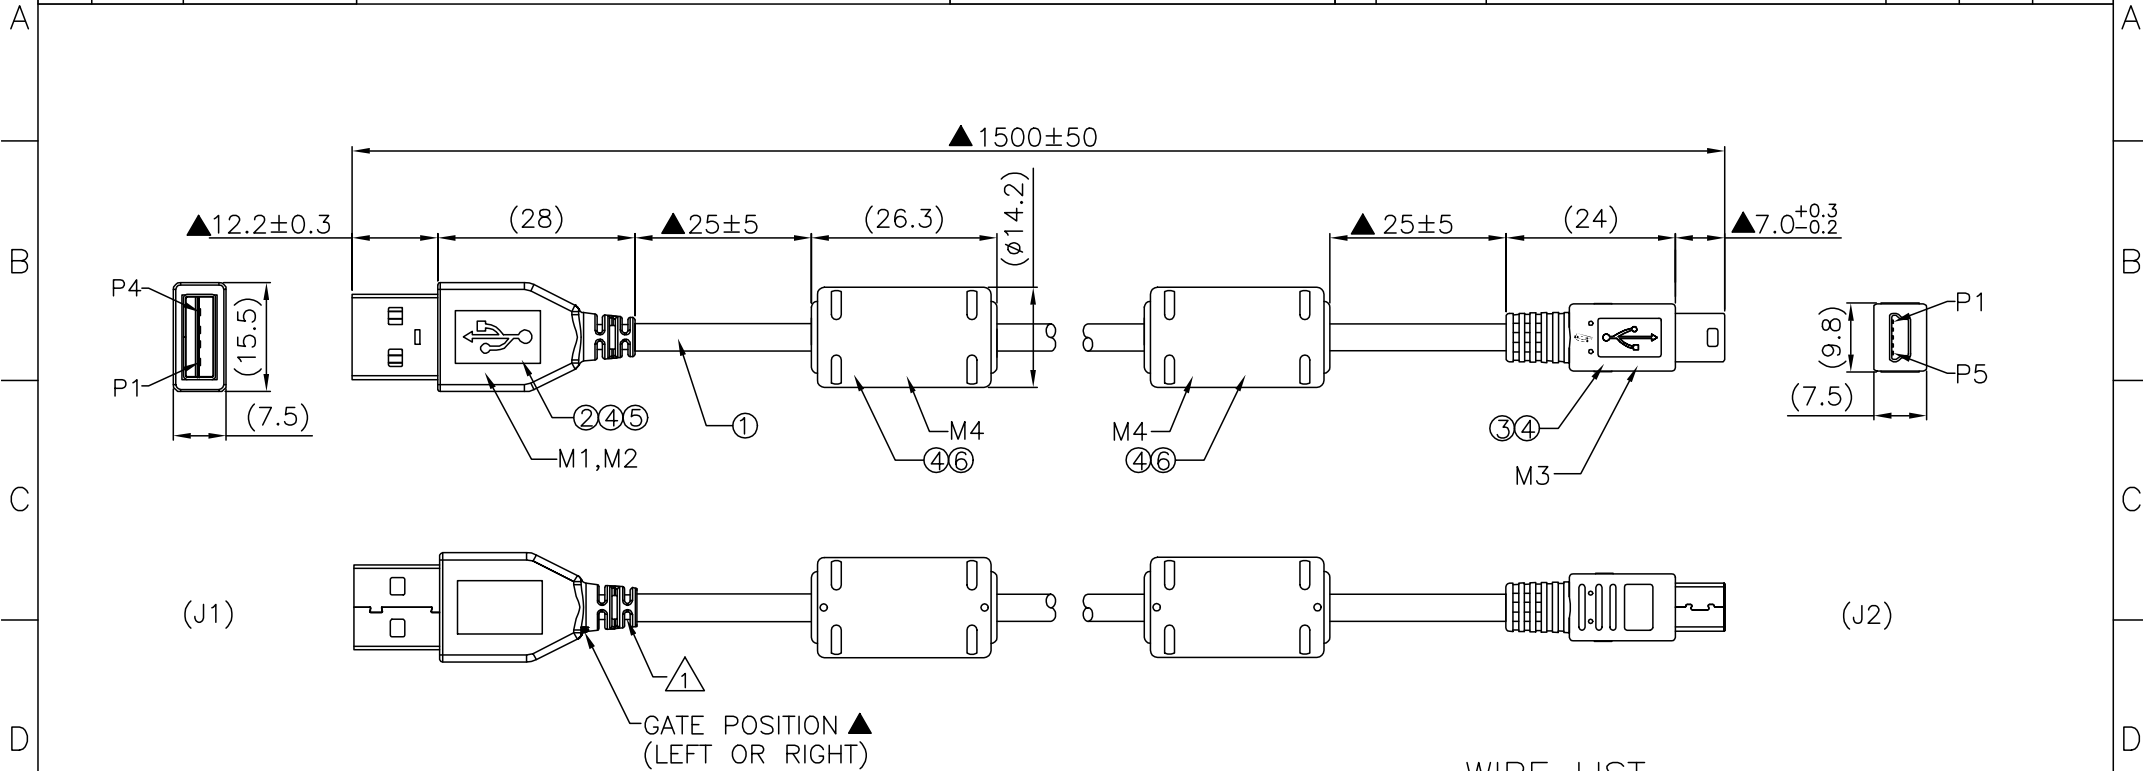

WIRE LIST

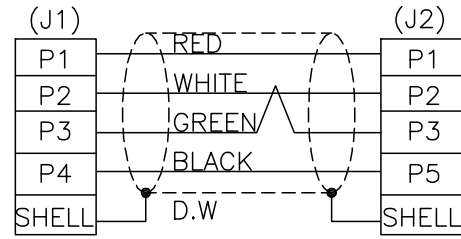


NOTE:
 1. TESTING CONDITION
 A. CONDUCTIVE RESISTANCE 2 Ohm Max.
 B. INSULATION RESISTANCE 20M Ohm Min
 WITH DC200V DURING 0.01second.
 2. Δ SR DOES NOT DAMAGE AFTER 90° BENDING



6	CORE: $\phi 10.5 \times 20 \times \phi 5.5$ mm	2PCS
5	PE, COLOR: NATURE	A/R
4	45P PVC COLOR: WHITE	A/R
3	CONN: (J2) MINI USB 5P B/M TYPE MALE CONNECTOR, INSULATOR: COLOR: BALCK, CONTACT: GOLD FLASH, SHELL: NICKEL PLATED	1PCS
2	CONN: (J1)USB A TYPE MALE CONNECTOR. INSULATION: WHITE. CONTACT: COPPER ALLOY, GOLD FLASH, SHELL: STEEL NICKEL PLATED	1PCS
1	CABLE: UL2725 28AWG*1P+26AWG*2C+EA, JACKET: WHITE PVC OD:3.5±0.2mm	A/R
ITEM	DESCRIPTION / P/N	Q'TY

RoHS COMPLIANT	Unit:mm(inch)	PROJECTION	ZCables.com	
	GENERAL TOLERANCES: (UNLESS SPECIFIED)	D.R. 07/13/2023	TITLE	PD./FILE NO.
	0 ± 1 (0.039)	Philip	USB A/M To Mini USB 5P W/Core*2	
	0.0 ± 0.5 (0.02)	CH.K 07/13/2023	L=1500mm	
0.000 ± 0.15 (0.012)	Philip	SCALE	SIZE	PART NO.
0° $\pm 2'$	APV.D 07/13/2023	1:1	A4	PCB042100351-1
0.0° $\pm 1'$	Richard	REV.		01
		SHEET		1 OF 2

1	2	3	4	5	6	7	8				
THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JESS-LINK PRODUCTS CO.,LTD.(JPC)				CUSTOMER DRAWING DRWC-XXXXXX		REV.	ECN NO.	DESCRIPTION	MDF'D	APP'D	DATE
						01		INITIAL DESIGN	Philip	Richard	07/13/2023
						02					
						03					



PAY ATTENTION TO THE MINI TIE BEND ON THE CABLE,
PREVENT PE BAG TO BE SCRATCHED.

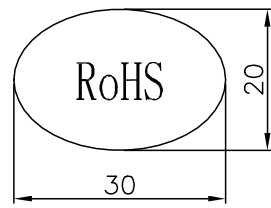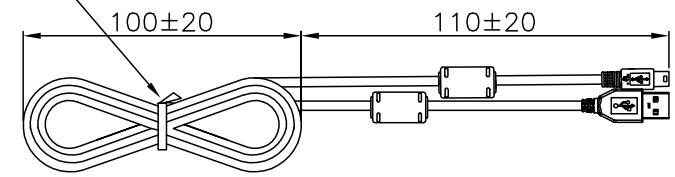


ROHS LABEL




LABEL 1


FONTS: Arial
FONT SIZE: 3.5#
FONT COLOR: BLACK

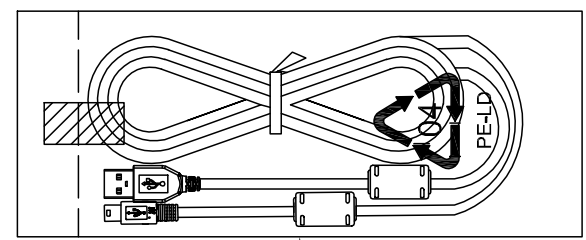

PE BAG: L200*W80*T0.045mm

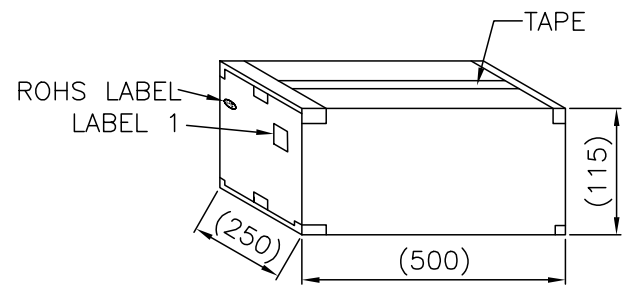

PACKING

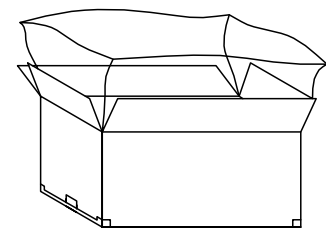

PACKING (100PCS/CARTON)

RoHS COMPLIANT	Unit:mm(inch)	PROJECTION 	ZCables.com	
	GENERAL TOLERANCES: (UNLESS SPECIFIED)	D.R. 07/13/2023		
	0 =±1 (0.039)	Philip	USB A/M To Mini USB 5P W/Core*2	
	0.0 =±.5 (0.02)	CH.K 07/13/2023	L=1500mm	
0.00 =±.3 (0.012)	Philip	SCALE	SIZE	PART NO.
0.000=±.15(0.006)	APV.D 07/13/2023	1:1	A4	PCB042100351-1
0° =± 2'	Richard			REV. 01
0.0° =± 1"				SHEET 2 OF 2