
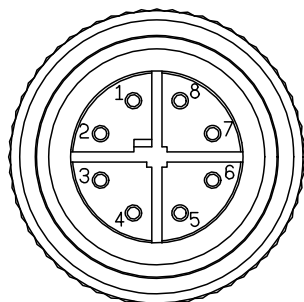



1	2	3	4	5	6	7	8				
THIS DRAWING AND THE DATA DISCLOSED HEREIN OR HEREWITH IS NOT TO BE REPRODUCED USED OR DISCLOSED IN WHOLE OR IN PART TO ANYONE WITHOUT THE PERMISSION OF JESS-LINK PRODUCTS CO.,LTD.(JPC)				CUSTOMER DRAWING DRWC-XXXXXX		REV.	ECN NO.	DESCRIPTION	MDF'D	APP'D	DATE
						01		INITIAL DESIGN	Philip	Richard	07/12/2023
						02					
						03					

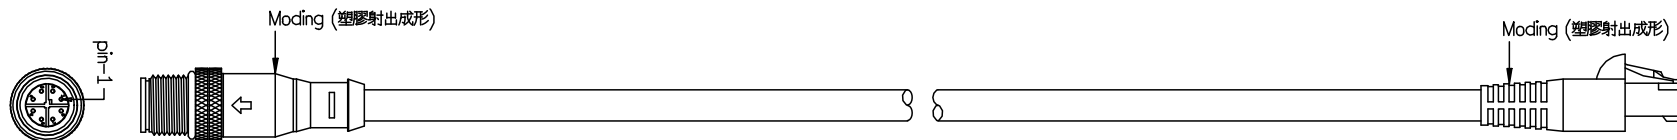

M12-8pins(公) 連接側腳位

線材:(CAT 5E,4x2x26AWG/19,綠)_X附表A.
剝線:2.5CM

M12-8pins(公)		色碼	RJ45-8pins	
1	橘/白	橘	1	剝線:2.5CM
2	橘	綠/白	2	
3	綠/白	綠	3	
4	綠	棕/白	6	
5	棕/白	棕	4	
6	棕	藍/白	5	
7	藍/白	藍	7	
8	藍		8	
隔離網壓接外殼	外殼		金屬外殼	隔離網壓接金屬外殼

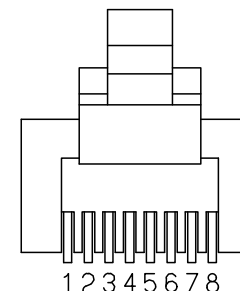

RJ45-8pins 連接側腳位

④	1010800086	多蕊PUR隔離	CAT 5E, 4x2x26AWG/19,綠,工業網路線,DDS26PD4UP-VE	附表A.
③	M1032500095	RJ45-網路線	RJ45-網路線 射出成形外殼(不含接頭)	1
②	1032301011	RJ45插頭-10P8C	RJ45插頭-網路接頭-10P8C-TA5711FS08	1
①	M1031201044	M12-X-CODE IDC接頭	8PIN-直型-組合式-X code 接頭 moding 塑膠外殼-外殼(公)	1
項次	料號	品名	規格	用量

RoHS COMPLIANT	Unit:mm(inch)	PROJECTION	ZCables.com	
	GENERAL TOLERANCES: (UNLESS SPECIFIED)	D.R. 07/12/2023	TITLE	
	0 ±1 (0.039)	Philip	M12 X Code 8 Pin Plug Male To RJ45	
	0.0 ±1.3 (0.012)	CH.K 07/12/2023	CAT5e SSTP PUS Cable 3M	
0.000±.15(0.006)	Philip	SCALE	SIZE	PART NO.
0° ± 2'	APV.D 07/12/2023	1:1	A4	PZBJKB030-0002
0.0° ± 1'	Richard	REV. 01	SHEET 1 OF 1	